

| PTE7300 SERIES

HERMETIC DIGITAL PRESSURE SENSOR

The PTE7300 pressure sensor is the sensing platform from Sensata Technologies offering best in class accuracy with excellent mechanical shock resistance and EMC protection to meet the most demanding applications in mid to high pressure ranges. Available with a wide range of ports, low power consumption, fast response time, and increased sensor diagnostics capabilities, enable customers to standardize and simplify designs.



Features

- Cyclical Redundancy Check (CRC) assures you that communications and data are reliable.
- Pressure ranges from 0-10 bar to 0-600 bar (0-145 to 0-8700 psi)
- Best in class accuracy and fast response time to meet the highest performance applications
- Digital pressure output and I²C bus for connecting multiple devices
- Low power consumption to optimize energy efficiency
- High Resistance to Electromagnetic Noise (EMC)
- Stainless steel, fully hermetic, IP69K sensor package and hermetic port modules available to meet the harshest environments
- Snubber option for dampening of pressure spikes due to hammer and cavitation
- REACH/RoHS/CE compliant⁽¹⁾

Applications

- Smart Water Networks and Smart Fire Hydrants
- Medical and Industrial Gas Monitoring
- OEM Hydraulic and Process Control
- Hydraulics and Pneumatics
- Mobile Hydraulics and Off-Highway Vehicles
- Pumps and Compressors
- Air Conditioning and Refrigeration Systems
- Plant Engineering and Automation

SPECIFICATIONS

Electrical

Pressure Ranges	0-10 bar to 0-600 bar (0-145 psi to 0-8700 psi)
Pressure Reference	Gauge (Module) and Sealed Gauge (fully hermetic sensor)
Supply Voltage	3.3VDC to 5.5VDC
Digital Interface	I ² C with CRC (memory integrity, and data transmission)
Device Address	0xDA (including CRC) 0x6C (excluding CRC)
Operating Current In Sleep Mode	6.5 uA (typical)
Operating Current In Active Mode	3.7mA typical (4mA maximum)
Available Data	Pressure (int16) Bridge temperature (int16) ⁽²⁾ Status (int16) Device serial (int32)
Resolution	15 bit
Response Time	< 1 ms @ Default setting and active mode
Probe Configurations	On-demand, single cycle

Recommended pull-up resistors	1kOhm to 10kOhm, depending on cable length
External Capacitive Load for I2C Bus Line	400 pF max (depends on the cable length)
ESD ⁽¹⁾	±4KV Contact; ±8KV Air
Radiated Immunity ⁽¹⁾	80-1000MHz 10V/m 1400-2000MHz 3V/m 2000-2700MHz 1V/m
Conducted Immunity ⁽¹⁾	0.15-80MHz 3Vrms
Magnetic Immunity ⁽¹⁾	3 A/m for 5 minutes

Physical

Proof Pressure	60bar (870 PSI) for full scale pressure ⁽¹⁾ = 10-29bar (145-420 PSI) 200bar (2900 PSI) for full scale pressure = 30-100bar (420-1450 PSI) 500bar (7250 PSI) for full scale pressure = 101-250bar (1450-3625 PSI) 800bar (11600 PSI) for full scale pressure = 251-400bar (3625-5800 PSI) 1200bar (17400 PSI) for full scale pressure = 401-600bar (5800-8700 PSI)
Burst Pressure	200bar (2900 PSI) for full scale pressure ⁽¹⁾ = 10-29bar (145-420 PSI) 2000bar (29000 PSI) for full scale pressure = 30-100bar (420-1450 PSI) 2500bar (36250 PSI) for full scale pressure = 101-250bar (1450-3625 PSI) 4000bar (58000 PSI) for full scale pressure = 251-600bar (3625-5800 PSI)
Vibration	IEC 60068-2-6 with 2.0mm displacement, Sensor: 30g (10...2000Hz); Module: 20g (10...2000Hz)
Mechanical Shock	IEC 60068-2-27, 50g min (Module); IEC 60068-2-27, 500g min (fully hermetic sensor)
Drop (any Axis)	1m
Water Hammer	1.6X full scale pressure for 100k cycles, 1.3xFS for 200k cycles
Ingress Protection	IP00 (Module), IP69K (fully hermetic sensor)
Media Compatibility	Fluids and Gases compatible with 17-4PH stainless steel


Performance

Pressure (Best Fit Straight)⁽³⁾	±0.25% FS @ 25°C
Pressure (Total Error Band)⁽⁴⁾	+/-1.5%FS @-20° to 85°C
Operating Endurance	>10M cycles
Operating Ambient Temperature	-40° to +100°C
Operating Media Temperature	-40° to +125°C
Storage Temperature	-40° to +125°C


DIMENSIONS

All dimensions are in millimeters


Overall Dimensions

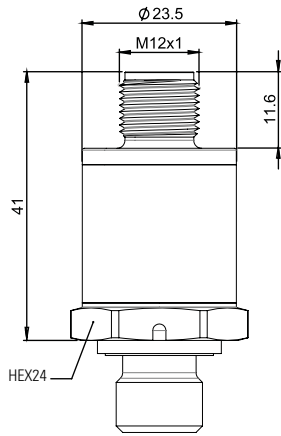


7/16-20 UNF-2A (MALE)




G1/4A DIN 3852-E



1/4-19 PT (R1/4)




1/4-18 NPTF





Electrical Connector


GTMS SENSOR
M12x1 5-POLE
IP69K

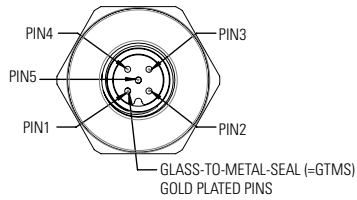

MODULE
IP00

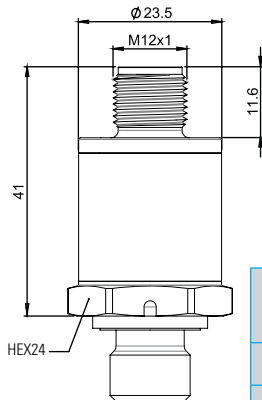

Pin Number	Description
1	(ALARM)
2	VSUPPLY
3	GND
4	SDA
5	SDC



Pin Number	Description
1	(ALARM)
2	VSUPPLY
3	GND
4	SDA
5	SDC

ORDERING OPTIONS

Example : PTE7300-14AM-1B016SN

PTE7300-XXXM-XXXXXXSX = GTMS-Sensor (Seal Gauge)
PTE7300-XXN-XXXXXXBX = Module (Gauge)

PTE7300 with G1/4A thread with external FKM o-ring seal, M12x1 hermetic connector, I²C with 15 bit resolution output, 16bar full scale pressure, sealed gage, with no snubber.

	PTE7300	-	1	4	A	M	-	1	B	016	S	N
Series												
PTE7300												
SEA Type												
0-29bar (0-420 PSI)												
30-100bar (420-1450 PSI)												
101-250bar (1450-3625 PSI)												
251-400bar (3625-5800 PSI)												
401-600bar (5800-8700 PSI)												
EMA Type												
4: I2C												
Pressure Port												
A: G1/4A DIN 3852-E												
B: 1/4-19PT (R1/4)												
C: 7/16-20 UNF-2A (MALE)												
D: 1/4-18NPT												
Electrical Connector												
M: M12x1 5-pin glass-to-metal-seal (sensor only)												
N: 5x1 2mm pitch pin to header (module only)												
External Sealing												
0: No sealing ring												
1: FKM (Viton) sealing ring (only for G1/4A pressure port)												
2: HNBR sealing ring (only for 7/16-20 UNF-2A MALE pressure port)												
Output Type												
B: I ² C (13 ENOB + CRC)												
Pressure Range												
010: 0-10bar = 145 PSI												
016: 0-16bar = 230 PSI												
025: 0-25bar = 360 PSI												
040: 0-40bar = 580 PSI												
050: 0-50bar = 725 PSI												
060: 0-60bar = 870 PSI												
100: 0-100bar = 1450 PSI												
160: 0-160bar = 2320 PSI												
200: 0-200bar = 2900 PSI												
250: 0-250bar = 3625 PSI												
350: 0-350bar = 5075 PSI												
400: 0-400bar = 5800 PSI												
500: 0-500bar = 7250 PSI												
600: 0-600bar = 8700 PSI												
Pressure Reference												
S: Sealed gauge (M12 5-pin only)												
B: Gauge (module only)												
Snubber												
N: No snubber												
S: Snubber with 0.5 damping hole												

AGENCY APPROVALS & CERTIFICATIONS⁽¹⁾



GENERAL NOTES

- ⁽¹⁾ If applicable, the customer shall verify if the pressure module (PTE7300-XXXN-XXXXXXBX) is compliant to the CE EMC directive: 2014/30/EU in the customer's application
- ⁽²⁾ Temperature is indirectly measured at the sensing element and is for reference only
- ⁽³⁾ Best fit straight line accuracy includes errors from non-linearity, non-repeatability, and hysteresis
- ⁽⁴⁾ Total error band accuracy includes errors from non-linearity, non-repeatability, hysteresis, zero offset, full span offset, and thermal effects

WARNINGS



RISK OF MATERIAL DAMAGE AND HOT ENCLOSURE

- The product's side panels may be hot, allow the product to cool before touching
- Follow proper mounting instructions including torque values
- Do not allow liquids or foreign objects to enter this product

Failure to follow these instructions can result in serious injury, or equipment damage.



HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Disconnect all power before installing or working with this equipment
- Verify all connections and replace all covers before turning on power

Failure to follow these instructions can result in death or serious injury.

Datasheets provided by Sensata Technologies, Inc., its subsidiaries and/or affiliates ("Sensata") are solely intended to assist third parties ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer's systems and products. Sensata datasheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular datasheet. Sensata may make corrections, enhancements, improvements, and other changes to its datasheets or components without notice.

Buyers are authorized to use Sensata datasheets with the Sensata component(s) identified in each particular datasheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATASHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATASHEETS OR USE OF THE DATASHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATASHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com. SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA

CONTACT US

Americas

+1 (800) 350 2727

sensors@sensata.com

switches@sensata.com

Europe, Middle East & Africa

+359 (2) 809 1826

pressure-info.eu@sensata.com

Asia Pacific

sales.isasia@list.sensata.com

China +86 (21) 2306 1500

Japan +81 (45) 277 7117

Korea +82 (31) 601 2004

India +91 (80) 67920890

Rest of Asia +886 (2) 27602006

ext 2808