

# Installation Instructions

## Prowler: S-PRI-WP/CTS/EM3/B




### Safety Precautions.

- **Power Isolation:** Always disconnect the power supply before installing, removing, or servicing the product to prevent electric shock, injury, or damage.
- **Qualified Installation:** Luminaires should be installed by a certified electrician in accordance with current local wiring regulations.
- **Damaged Components:** Replace any broken or faulty parts promptly. Spectre Lighting cannot be held liable for issues resulting from poor installation practices.
- **Ambient Temperature:** Ensure the room temperature does not exceed 25°C during operation.
- **Power Supply Compatibility:** These products are intended for use with a mains supply of 230–240V~ at 50/60Hz.
- **Inrush Current Consideration:** You may need to upgrade your MCBs to accommodate higher inrush currents.
- **Insulation Testing:** Do not perform insulation resistance tests while the product is connected to the circuit.
- **Preparation:** Review all instructions thoroughly and confirm you have the necessary tools and accessories for proper installation.

5yrs  
Warranty

Unit 8, Gemini 8 Business Park  
Charon Way  
Apollo Park  
Warrington  
WA5 7AE

[www.spectre-lighting.com](http://www.spectre-lighting.com)

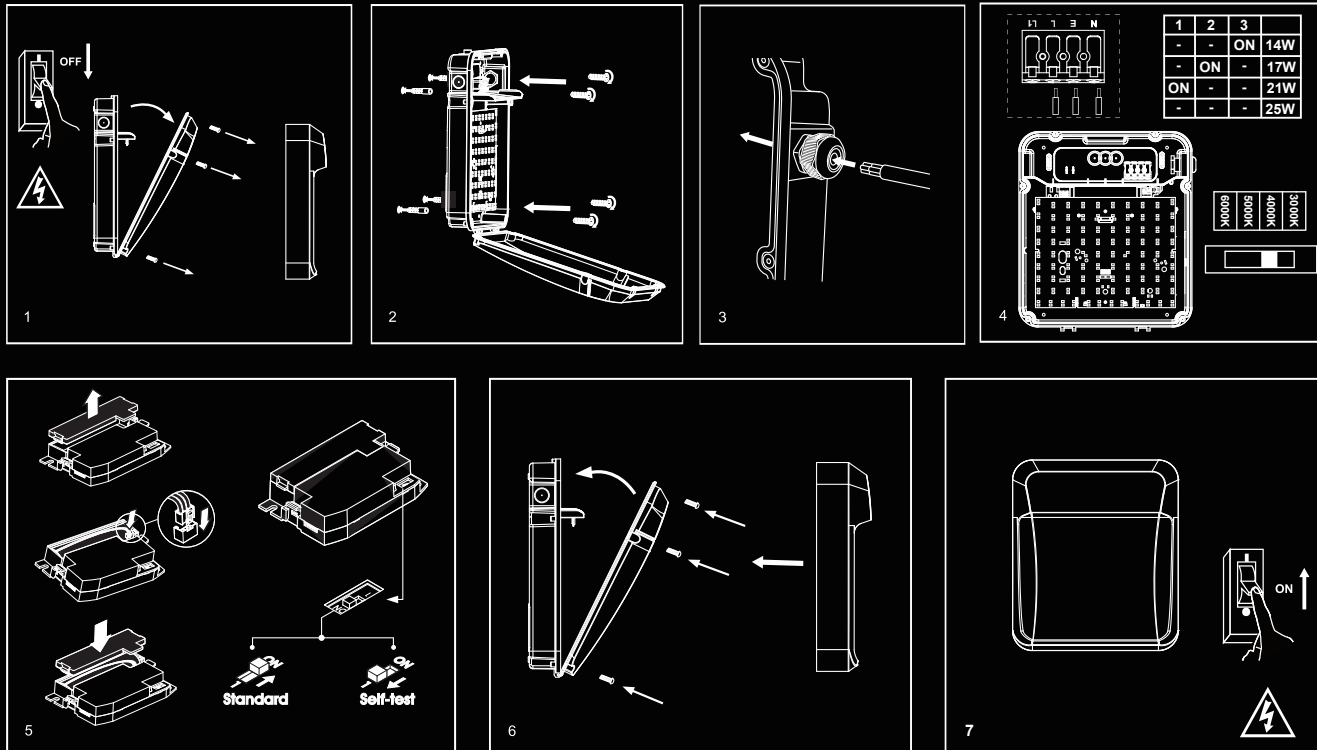

### Installation

Fig 1 -Ensure mains supply is switched off before commencing work.

Remove cover manually and remove diffuser by using screwdriver.

Fig 2 -Mark appropriate fixing hole positions on wall, check location of buried cables, pipes and other building services before drilling. Attach the base to surface using accessories provided.

Fig 3 -Feed supply cables through cable entry hole.

Fig 4 -Connect the power supply cables to terminal blocks. Move switch on the front of the LED PCB board to select the colour temperature:

3000K, 4000K, 5000K or 6000K.

Select the wattage (14W, 17W, 21W or 25W) on the driver via DIP switch.

Fig 5 -Open the case of the EM Pack and connect the battery plug.

Select Standard or Self-test mode.

Straighten the LED indicator on the LED board.

Fig 6 -Refit the diffuser and the cover to the base.

Fig 7 -Re-apply mains power.

IP65



# Installation Instructions

## Prowler: S-PRI-WP/CTS/B









Unit 8, Gemini 8 Business Park  
Charon Way  
Apollo Park  
Warrington  
WA5 7AE

[www.spectre-lighting.com](http://www.spectre-lighting.com)

### Safety Precautions.

- Power Isolation: Always disconnect the power supply before installing, removing, or servicing the product to prevent electric shock, injury, or damage.
- Qualified Installation: Luminaires should be installed by a certified electrician in accordance with current local wiring regulations.
- Damaged Components: Replace any broken or faulty parts promptly. Spectre Lighting cannot be held liable for issues resulting from poor installation practices.
- Ambient Temperature: Ensure the room temperature does not exceed 25°C during operation.
- Power Supply Compatibility: These products are intended for use with a mains supply of 230–240V~ at 50/60Hz.
- Inrush Current Consideration: You may need to upgrade your MCBs to accommodate higher inrush currents.
- Insulation Testing: Do not perform insulation resistance tests while the product is connected to the circuit.
- Preparation: Review all instructions thoroughly and confirm you have the necessary tools and accessories for proper installation.

5yrs  
Warranty

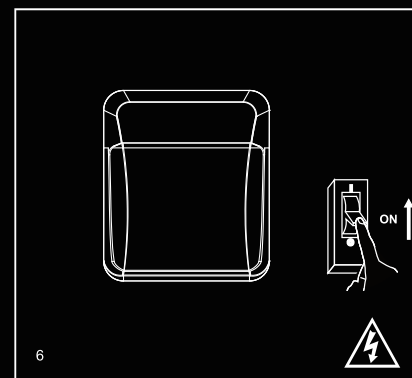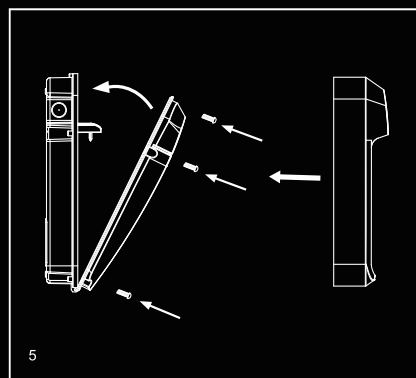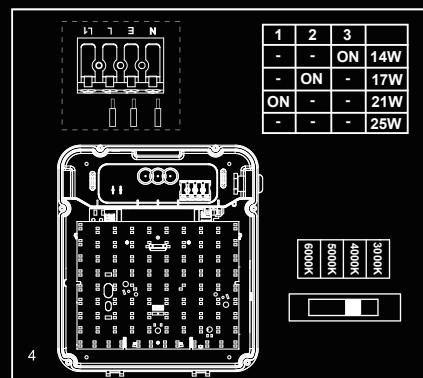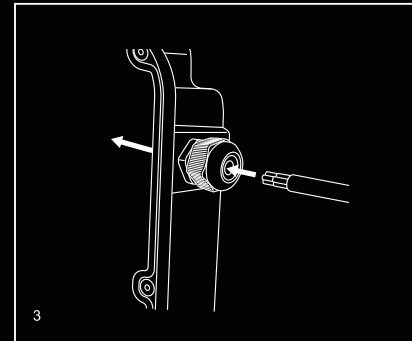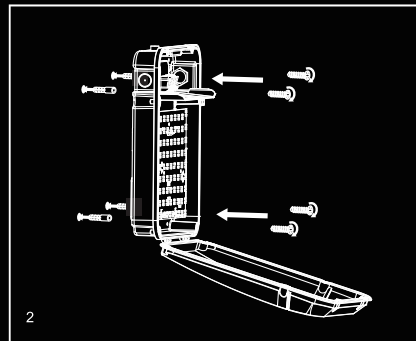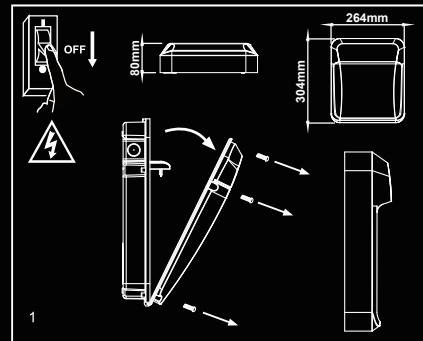

### Installation

Fig 1 -Ensure mains supply is switched off before commencing work.

Remove cover manually and remove diffuser by using screwdriver.

Fig 2 -Mark appropriate fixing hole positions on wall, check location of buried cables,

pipes and other building services before drilling. Attach the base to surface using accessories provided.

Fig 3 -Feed supply cables through cable entry hole.

Fig 4 -Connect the power supply cables to terminal blocks. Move switch on the front

of the LED PCB board to select the colour temperature:

3000K, 4000K, 5000K or 6000K.

And select the wattage (14W, 17W, 21W or 25W) on the driver via DIP switch.

Fig 5 -Refit the diffuser and the cover to the base.

Fig 6 -Re-apply mains power.

IP65



UK  
CA

RoHS  
Compliant



# Installation Instructions

## Prowler: S-PRI-WP/CTS/B



Unit 8, Gemini 8 Business Park  
Charon Way  
Apollo Park  
Warrington  
WA5 7AE

[www.spectre-lighting.com](http://www.spectre-lighting.com)

### Specification



#### S-PRI-WP/CTS/B

- Voltage Range – 220-240V 50/60Hz
- CCT – 3000K / 4000K / 5000K / 6000K
- CRI80
- IP65 IK10
- 14W / 17W / 21W / 25W Selectable
- 1750lm – 3125lm / 125lm/W
- Temp Range -20 – +45 °C


### Specification

#### S-PRI-WP/CTS/EM3/B

- Voltage Range – 220-240V 50/60Hz
- CCT – 3000K / 4000K / 5000K / 6000K
- CRI80
- IP65 IK10
- 14W / 17W / 21W / 25W Selectable
- 1750lm – 3125lm / 125lm/W
- 3hrs emergency duration
- Temp Range 0 – +45 °C

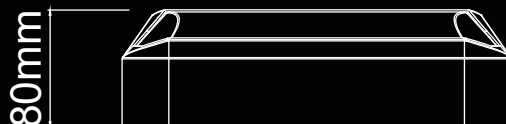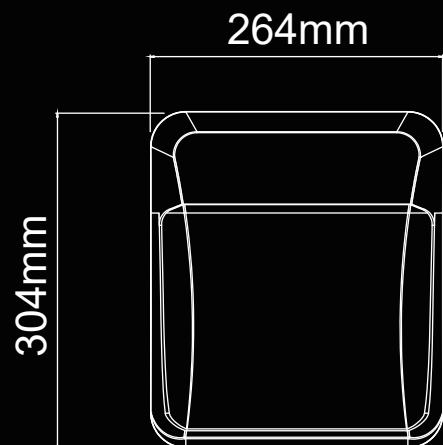

The light source of this luminaire is not replaceable; when the light source reaches its end of life the luminaire shall be replaced, utilising the existing driver.



### ⚠ Important Disposal Information for Waste Electrical & Electronic Equipment (WEEE)

Please be aware that Waste Electrical and Electronic Equipment (WEEE), identified by the crossed-out wheelie bin symbol, must NOT be disposed of with regular household waste.

We encourage you to support reuse, recycling, and responsible recovery by returning this product—once it reaches the end of its life—to an appropriate collection point. This may include a designated waste equipment centre, a civic amenity site, or the retailer where you originally purchased the item or are buying a replacement.

Improper disposal of this equipment may release substances that are harmful to both human health and the environment. To prevent this, it is essential that WEEE is separated from general waste and processed through approved recycling channels.

The crossed-out wheelie bin symbol serves as a reminder that this product requires special handling in accordance with local WEEE regulations.

IP65



