

Instructions

HaloGrid: S-HG-XX/CTS/W



Spectre Lighting
 Unit 8 Gemini 8 Business Park
 Charon Way
 Apollo Park
 Warrington
 WA5 7AE

www.spectre-lighting.com

Safety Precautions.

- Power Isolation: Always disconnect the power supply before installing, removing, or servicing the product to prevent electric shock, injury, or damage.
- Qualified Installation: Luminaires should be installed by a certified electrician in accordance with current local wiring regulations.
- Damaged Components: Replace any broken or faulty parts promptly. Spectre Lighting cannot be held liable for issues resulting from poor installation practices.
- Ambient Temperature: Ensure the room temperature does not exceed 40°C during operation.
- Power Supply Compatibility: These products are intended for use with a mains supply of 220–240V~ at 50/60Hz.
- Inrush Current Consideration: You may need to upgrade your MCBs to accommodate higher inrush currents.
- Insulation Testing: Do not perform insulation resistance tests while the product is connected to the circuit.
- Preparation: Review all instructions thoroughly and confirm you have the necessary tools and accessories for proper installation.

5yrs
 Warranty

3

3CCT selectable
 WW NW CW

3 Wattage selectable
 ON OFF

	1	2	Wattage	Lumen selectable
S-HG-60/ CTS/W	ON	ON	32W	4200Lm
	ON	-	25W	3300Lm
	-	-	15W	2000Lm
S-HG-120/ CTS/W	ON	ON	48W	6240Lm
	ON	-	38W	4940Lm
	-	-	28W	3640Lm

Installation Instructions

Fig 1. Ensure power supply is isolated before proceeding with installation. Take remote driver (disconnected from Panel) Remove driver protective cover.

Fig 2. Connect supply cables to driver. Using a small screwdriver, push terminal button down (1) and insert cable (2). These products are intended for use with a mains supply of 220–240V~ at 50/60Hz.

Fig 3. Select desired output and CCT using inline CCT switch and wattage selection located on driver housing.

Fig 4. Once supply cable is in position, secure and fix supply cables into position replace driver protective cover.

Fig 5. Connect the driver to the panel.
 Offer panel into ceiling

Fig 6. Ensure panel is placed securely onto ceiling grip.

Fig 7. Reinstate power supply.

IP44

CE UK CA RoHS



Instructions

HaloGrid : S-HG-XX/CTS/W



Spectre Lighting
 Unit 8 Gemini 8 Business Park
 Charon Way
 Apollo Park
 Warrington
 WA5 7AE

www.spectre-lighting.com

Specification

S-HG-60/CTS/W

- Voltage Range – 220-240V 50/60Hz
- CCT – 3000K / 4000K / 6500K
- CRI80
- 15W / 25W / 32W – 130Lm/W
- 2,000lm / 3,000lm / 4,200lm
- Temp Range -10 – 40 °C


Specification

S-HG-120/CTS/W



- Voltage Range – 220-240V 50/60Hz
- CCT – 3000K / 4000K / 6500K
- CRI80
- 28W / 38W / 48W – 130Lm/W
- 3,640lm / 4,940lm / 6,240lm
- Temp Range -10 – 40 °C

Dimensions

S-HG-60/CTS/W

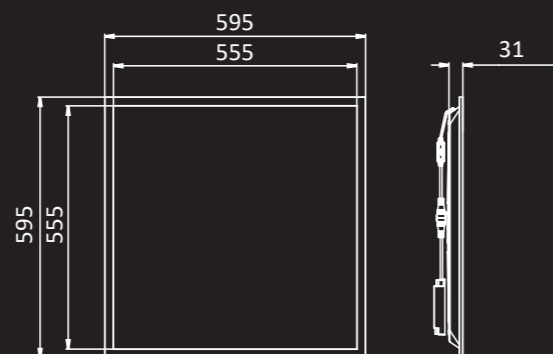

S-HG-120/CTS/W

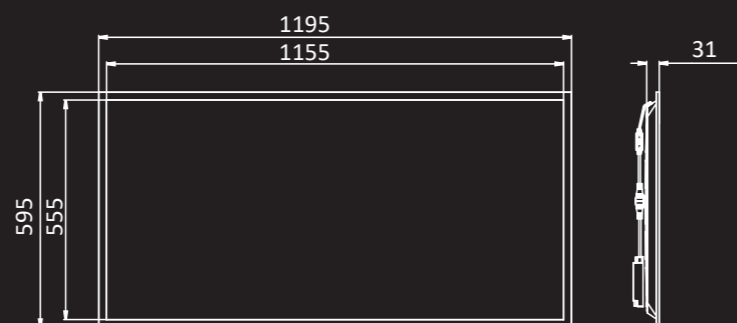

The light source of this luminaire is not replaceable; when the light source reaches its end of life the luminaire shall be replaced, utilising the existing driver.



⚠ Important Disposal Information for Waste Electrical & Electronic Equipment (WEEE)

Please be aware that Waste Electrical and Electronic Equipment (WEEE), identified by the crossed-out wheelie bin symbol, must NOT be disposed of with regular household waste.

We encourage you to support reuse, recycling, and responsible recovery by returning this product—once it reaches the end of its life—to an appropriate collection point. This may include a designated waste equipment centre, a civic amenity site, or the retailer where you originally purchased the item or are buying a replacement.

Improper disposal of this equipment may release substances that are harmful to both human health and the environment. To prevent this, it is essential that WEEE is separated from general waste and processed through approved recycling channels.

The crossed-out wheelie bin symbol serves as a reminder that this product requires special handling in accordance with local WEEE regulations.

IP44

