

Instructions

LED Driver: S-DR-XX/24V/I



Unit 8 Gemini 8 Business Park,
Charon Way
Apollo Park
Warrington
WA5 7YA

www.spectre-lighting.com

Specification

S-DR-15/24V/I

- Voltage Range – 220-240V 50/60Hz
- 15W 24V
- Min & Max Wattage 0W –15W
- Max inrush (A/uS) – 10/150
- Temp Range -20 – 45 °C
- Max Conductor size – 2.5mm²

S-DR-20/24V/I

- Voltage Range – 220-240V 50/60Hz
- 20W 24V
- Min & Max Wattage 0W –20W
- Max inrush (A/uS) – 15/145
- Temp Range -20 – 45 °C
- Max Conductor size – 2.5mm²

S-DR-30/24V/I

- Voltage Range – 220-240V 50/60Hz
- 30W 24V
- Min & Max Wattage 0W –30W
- Max inrush (A/uS) – 16/264
- Temp Range -20 – 45 °C
- Max Conductor size – 2.5mm²

S-DR-45/24V/I

- Voltage Range – 220-240V 50/60Hz
- 45W 24V
- Min & Max Wattage 0W –45W
- Max inrush (A/uS) – 27/300
- Temp Range -20 – 45 °C
- Max Conductor size – 2.5mm²

S-DR-60/24V/I

- Voltage Range – 220-240V 50/60Hz
- 60W 24V
- Min & Max Wattage 0W –60W
- Max inrush (A/uS) – 27/300
- Temp Range -20 – 45 °C
- Max Conductor size – 2.5mm²

S-DR-75/24V/I

- Voltage Range – 220-240V 50/60Hz
- 75W 24V
- Min & Max Wattage 0W –75W
- Max inrush (A/uS) – 29/250
- Temp Range -20 – 45 °C
- Max Conductor size – 2.5mm²

S-DR-90/24V/I

- Voltage Range – 220-240V 50/60Hz
- 90W 24V
- Min & Max Wattage 0W –90W
- Max inrush (A/uS) – 38/365
- Temp Range -20 – 45 °C
- Max Conductor size – 2.5mm²

S-DR-120/24V/I


- Voltage Range – 220-240V 50/60Hz
- 120W 24V
- Min & Max Wattage 0W –120W
- Max inrush (A/uS) – 38/365
- Temp Range -20 – 45 °C
- Max Conductor size – 2.5mm²

S-DR-180/24V/I


- Voltage Range – 220-240V 50/60Hz
- 180W 24V
- Min & Max Wattage 0W –180W
- Max inrush (A/uS) – 28/137
- Temp Range -20 – 45 °C
- Max Conductor size – 2.5mm²

Dimensions


S-DR-15/24V/I
S-DR-20/24V/I

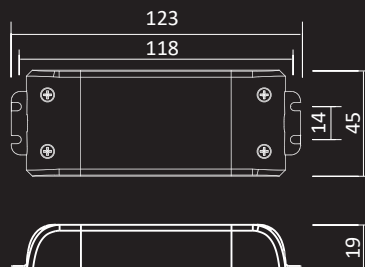

S-DR-30/24V/I

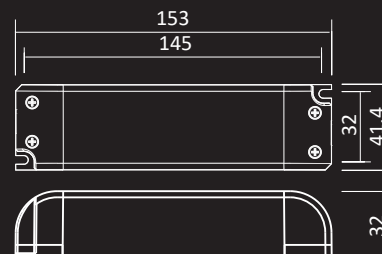

S-DR-45/24V/I
S-DR-60/24V/I
S-DR-75/24V/I

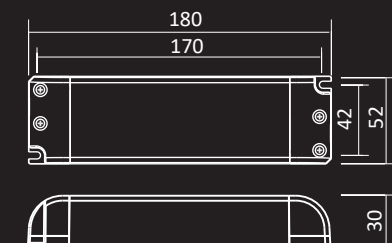

Instructions

HaloGrid : S-HG-XX/CTS/W




Unit 8 Gemini 8 Business Park,
Charon Way
Apollo Park
Warrington
WA5 7YA


www.spectre-lighting.com

Dimensions

S-DR-90/24V/I
S-DR-120/24V/I

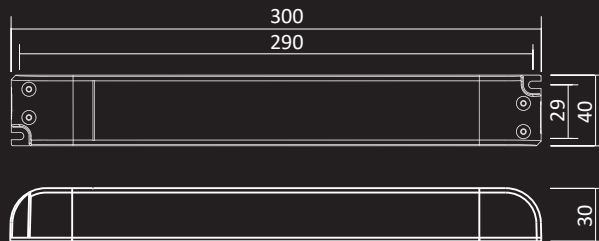

S-DR-180/24V/I

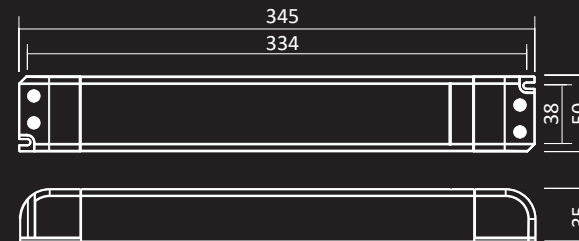

⚠ Important Disposal Information for Waste Electrical & Electronic Equipment (WEEE)

Please be aware that Waste Electrical and Electronic Equipment (WEEE), identified by the crossed-out wheelee bin symbol, must NOT be disposed of with regular household waste.

We encourage you to support reuse, recycling, and responsible recovery by returning this product—once it reaches the end of its life—to an appropriate collection point. This may include a designated waste equipment centre, a civic amenity site, or the retailer where you originally purchased the item or are buying a replacement.

Improper disposal of this equipment may release substances that are harmful to both human health and the environment. To prevent this, it is essential that WEEE is separated from general waste and processed through approved recycling channels.

The crossed-out wheelee bin symbol serves as a reminder that this product requires special handling in accordance with local WEEE regulations.

IP20

CE UK CA RoHS